

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 January 2001 (04.01.2001)

PCT

(10) International Publication Number
WO 01/01649 A1

(51) International Patent Classification⁷: **H04L 27/20**

(74) Agent: **HOSTE, Colin, Francis**; Marconi Intellectual Property, Waterhouse Lane, Chelmsford, Essex CM1 2QX (GB).

(21) International Application Number: **PCT/GB00/02200**

(22) International Filing Date: **7 June 2000 (07.06.2000)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
9914941.1

25 Dec 01/30me
25 June 1999 (25.06.1999) **GB**

(71) Applicant (for all designated States except US): **MARCONI CASWELL LIMITED** [GB/GB]; One Bruton Street, London W1X 8AQ (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **FORSTER, Ian, James** [GB/GB]; 31 Great Cob, Springfield, Chelmsford, Essex CM1 6LA (GB); **FARR, Adrian, Nigel** [GB/GB]; The Mill House, Bran End, Stebbing, Dunmow, Essex CM6 3RS (GB).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **REFLECTING MODULATOR CIRCUIT COMPRISING A NEGATIVE IMPEDANCE AMPLIFIER**

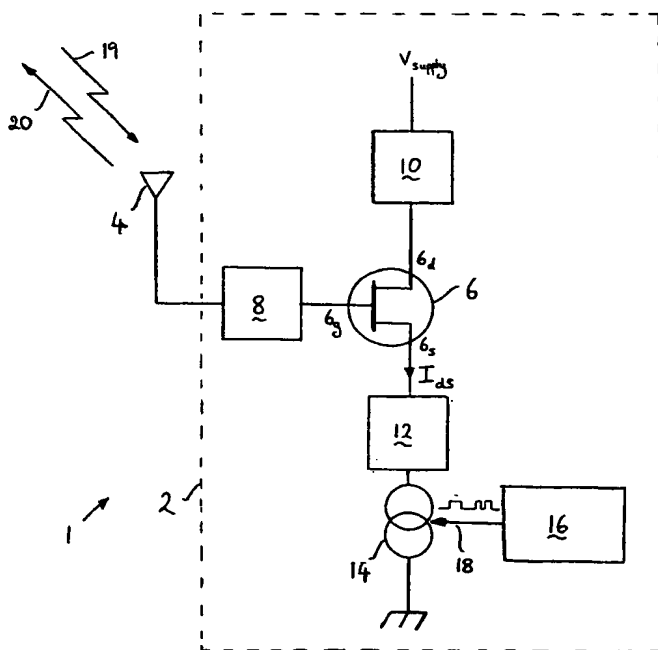

(57) Abstract: A modulator circuit comprises a negative impedance amplifier (6) which is operable such that a signal applied to the amplifier (6) is reflected and amplified. Switching means (14, 16) are provided for switching the impedance of the amplifier (6) between two reflecting states such that the reflected and amplified signal is phase modulated. The impedances of the negative impedance amplifier are selected such that the phase of the reflected and amplified signal switches by substantially 180 degrees. Preferably the impedances of the negative impedance amplifier in the two reflecting states are selected such that the reflection gain of the amplifier in the two reflecting states is substantially the same such that the reflected and amplified signal is a binary phase shift keyed.

209050" 04T6T00F

WO 01/01649 A1